



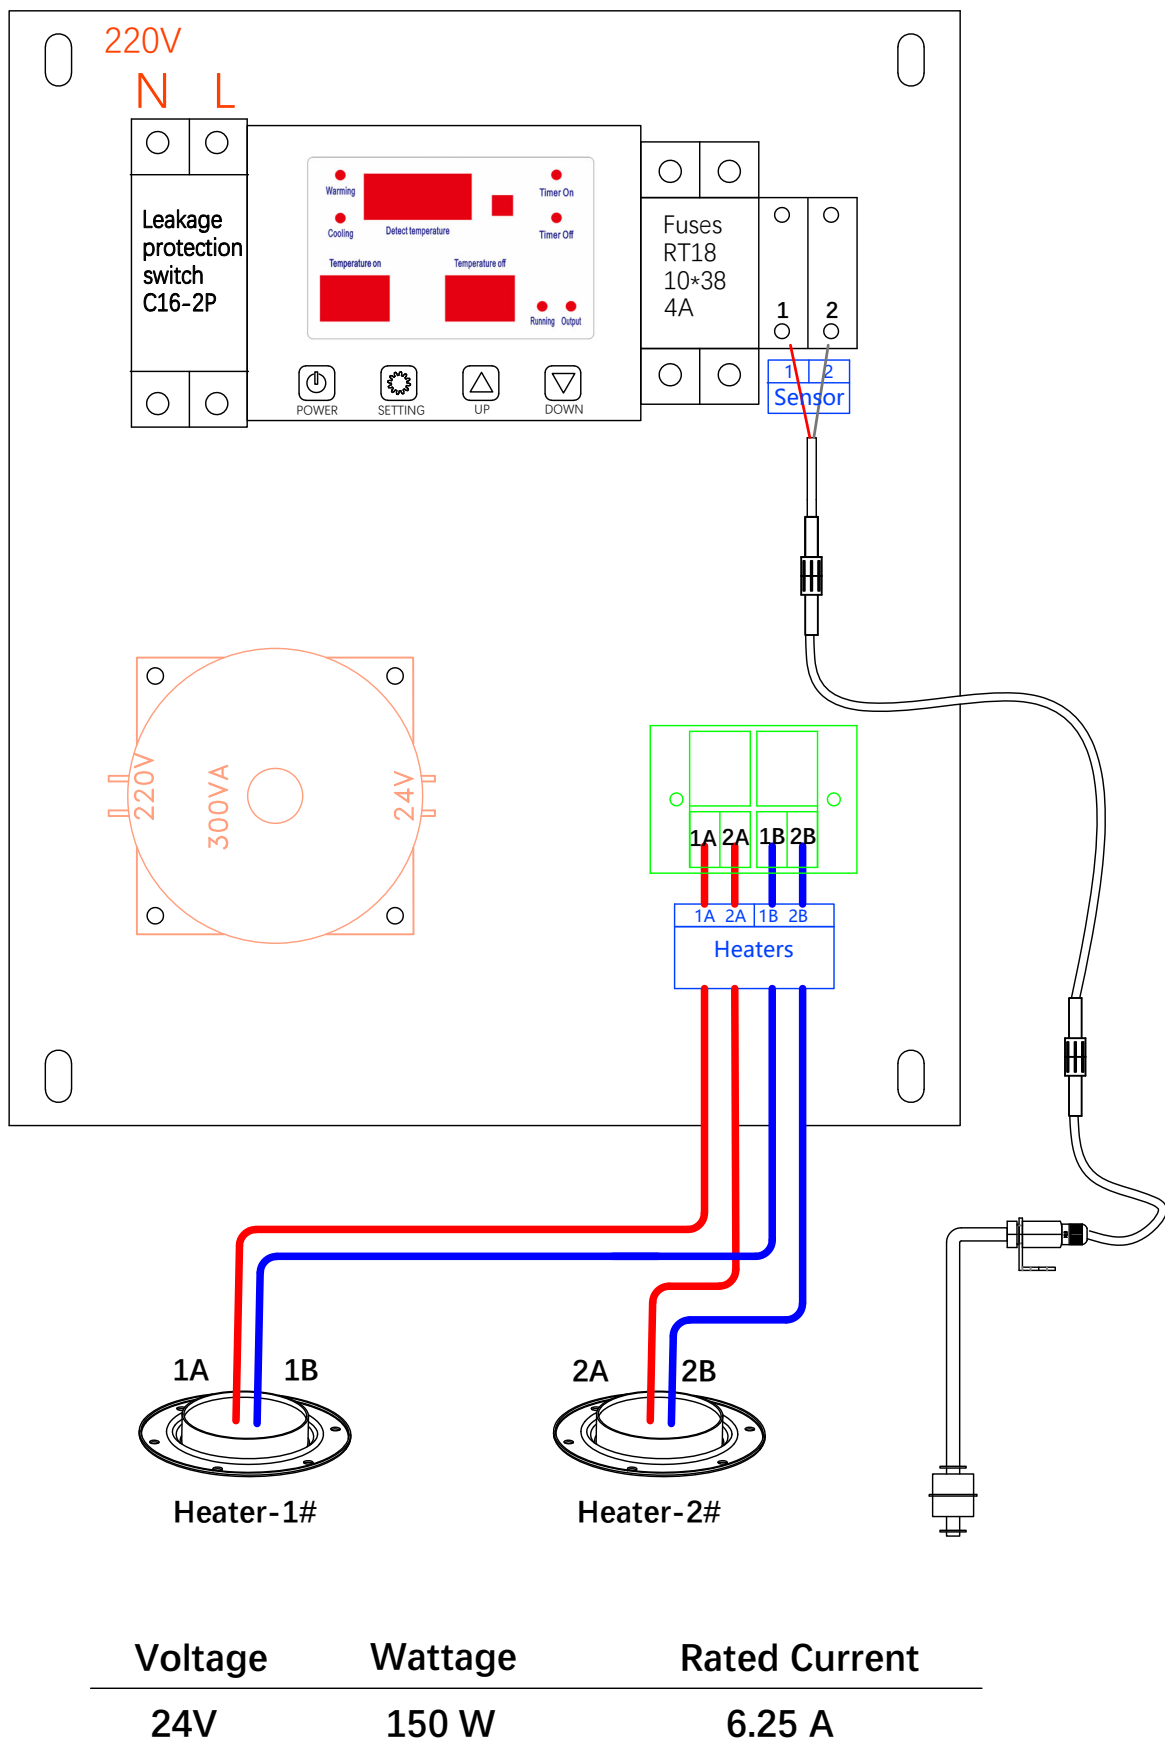

Please select the suitable wire based on the operating current.
Heaters with a power of 150W and 300W can be wired according to this diagram.

Because of the high current, for safety reasons, it is recommended that each heater be connected to the control box with a separate cable, not in parallel.

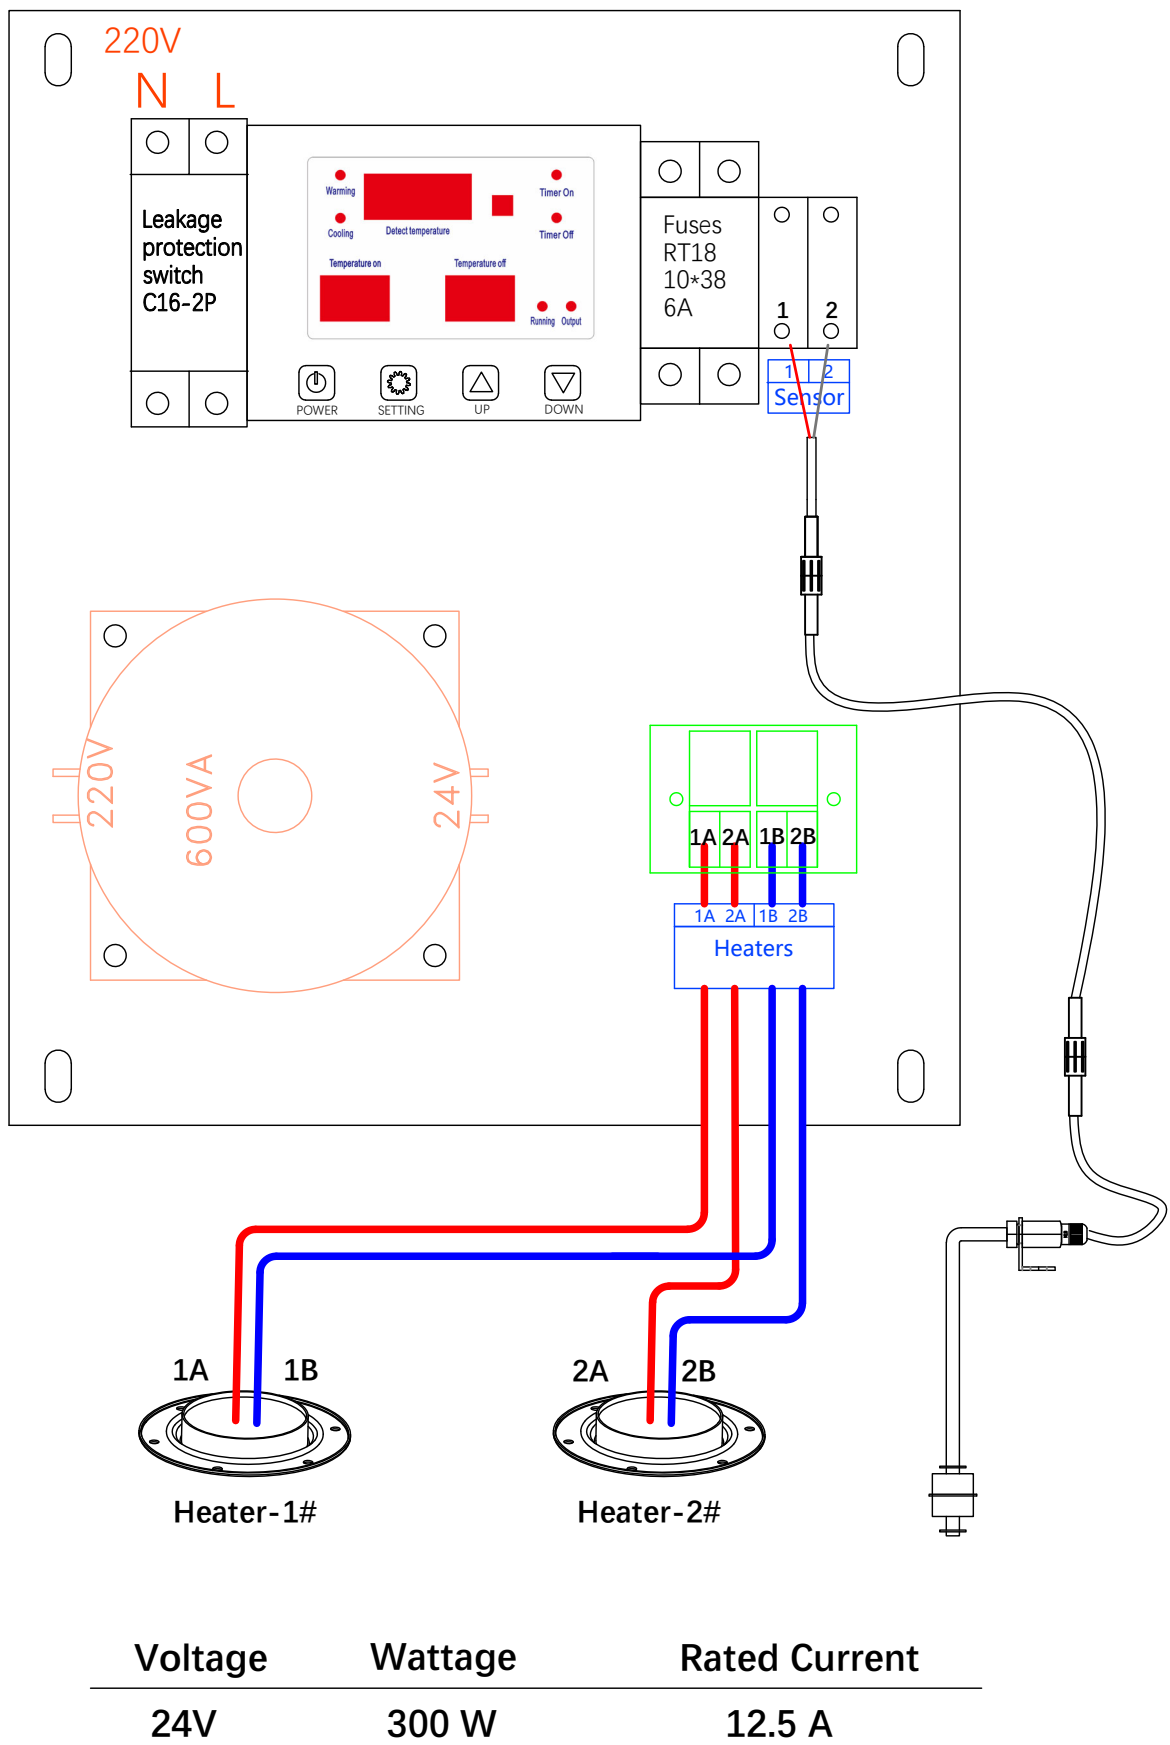

Please select the suitable wire based on the operating current.
Heaters with a power of 150W and 300W can be wired according to this diagram.

Because of the high current, for safety reasons, it is recommended that each heater be connected to the control box with a separate cable, not in parallel.